




## Bank Stabilization

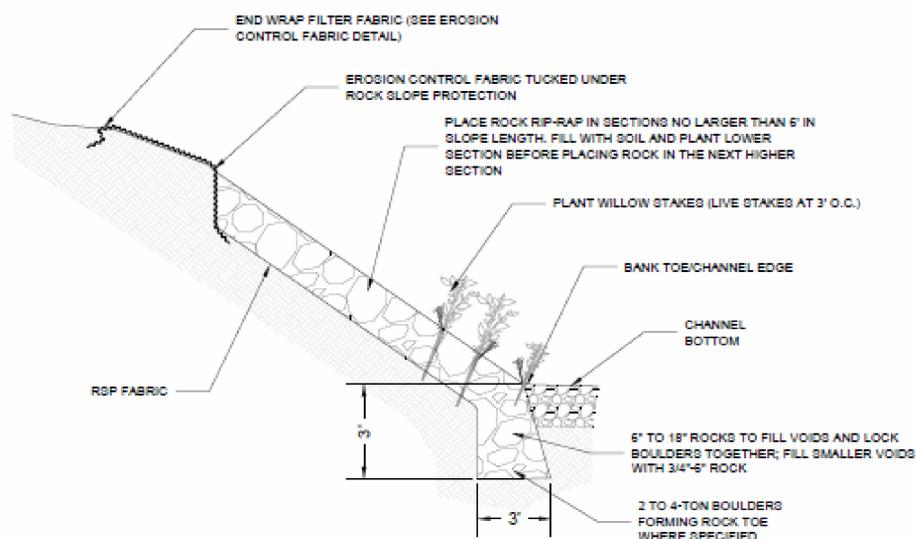

**1 PLANTED ROCK REVETMENT**  
NTS

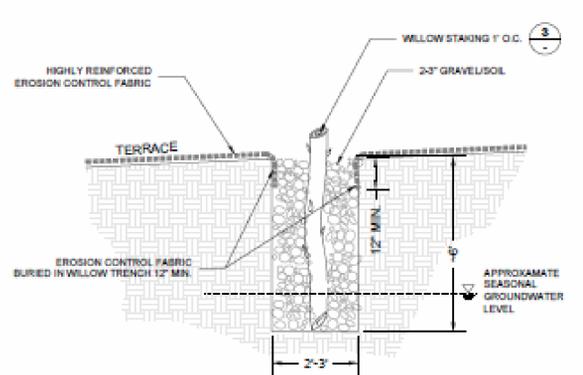


**2 WILLOW TRENCH AND EROSION CONTROL FABRIC**  
NTS

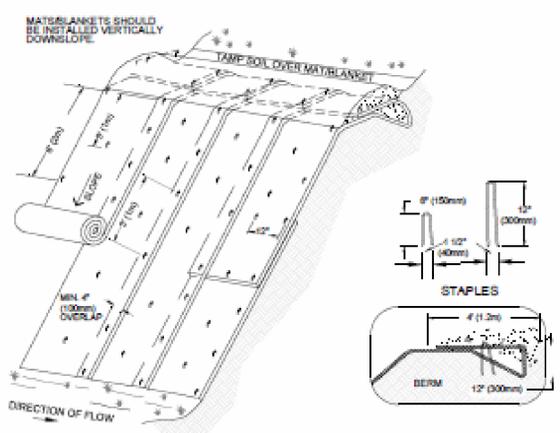


- NOTES:**
1. EROSION CONTROL BLANKETS/MATS SHALL BE BIODEGRADABLE (SEE SPECS)
  2. SLOPE SURFACE SHALL BE FREE OF ROCKS, CLODS, STICKS AND GRASS.
  3. MATS/BLANKETS SHALL HAVE GOOD SOIL CONTACT.
  4. APPLY PERMANENT SEEDING BEFORE PLACING BLANKETS.
  5. LAY BLANKETS LOOSELY AND STAKE OR STAPLE TO MAINTAIN DIRECT CONTACT WITH THE SOIL. DO NOT STRETCH.

**3 EROSION CONTROL FABRIC**  
NTS

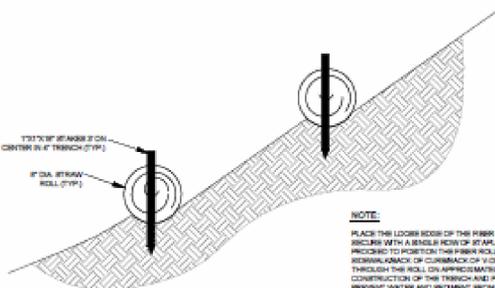

**4 FIBER ROLLS**  
NTS

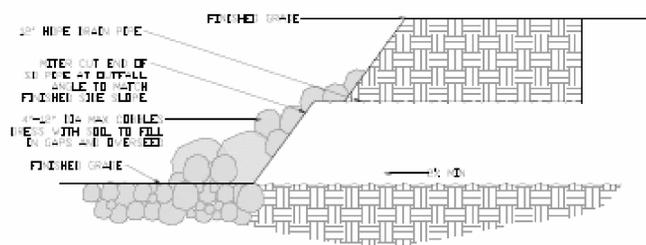

**5 OUTFALL PROTECTION**  
NTS

- Increased flood protection
- Erosion control
- Increased water quality by reducing sediment loading



Bank stabilization from Las Virgenes Creek Restoration-Phase I



CITY of CALABASAS

